

## ERGONOMICS: AN IMPLEMENTATION & COMBINATION WITH DIGITAL PRODUCT DEVELOPMENT

<sup>1</sup>Vinay Kumar Singh, <sup>2</sup> Dr. M K Arya, <sup>3</sup> Rahul Kumar

<sup>1</sup>Team Leader- KBE&DPDS, Tata Technologies Ltd., Lucknow, India, <sup>2</sup> Associate Professor, Institute of Management Studies, Devi Ahilya University, Indore, India, <sup>3</sup> AGM- KBE&DPDS, Tata Technologies Ltd., Jamshedpur, India,

Email : <sup>1</sup>vinay.singh@tatatechnologies.com), <sup>2</sup>maneesharya@gmail.com, <sup>3</sup>Rahul.Kumar@tatatechnologies.com)

**Abstract:** In the past years, human factor (ergonomics) has assumed a point of crucial importance in engineering, design, development, service and maintenance sectors of industrial products. Nevertheless, in the automotive segment companies are focusing more and more on driver and passengers comfort to cater the expectations of customers, beat the immense competition and reach & extend different market segments. This paper emphasizes the introduction and combination of virtual ergonomics review along with the Digital Mock-Up (DMU) review process followed in automotive industry.

In this paper, we have reviewed the ergonomic aspects of an automobile digitally during the conceptualization and digital development phases of product cycle. A comparative case study has been conducted at the *Tata Motors Ltd. Lucknow* manufacturing facility to compare the digital and physical ways of reviewing the ergonomic aspects of driver seat, ABC pedal position, GSL position & steering wheel position.

The paper finally concludes the implementation and combination of digital ergonomic review with the digital product development reviews.

**Keywords:** GSL, DMU, ergonomics, digital ergonomic.

### 1. INTRODUCTION

Ergonomics is a scientific study of interaction between relative position of instruments with respect to human body to overcome or improve the fatigue, creep & visibility aspects.

Earlier, after the design finalization, physical test were performed for the ergonomic suitability after physical manufacturing of the product which resulted in difficulties related to design change and cost effectiveness. Using 3D ergonomics simulation over a virtual vehicle 3D CAD DMU provides the designer the complete idea of behavior and condition of intended users/customers much earlier during the phase of product development resulting in total cost & time reduction in producing a customer friendly product.

Digital Mock-Up (DMU) review process is of indispensable importance in different phases in product design and development. It is started from product concept design to design review phases (Refer the figure 1), under the consideration of different boundary conditions. DMU process includes the Concept Design, Concept Review, Virtual Validation, Detailed Design & Design Review, all of which are conducted in the context of the customer requirements & marketing analysis.

Comfort, safety and adjustment option in any vehicle plays a key factor among the five most important purchase arguments for customers. In developed countries like US, customers even claim for insurance if they encounter any physical problem due to ergonomically bad considerations.

#### 1.1 Product Design & Development Aspects

Three major aspects of product design and development need to be taken care of while designing,

- Packaging
- Integration
- Functionality

#### Packaging

Packaging refers to complete placement of an aggregates/assembly/sub-assembly on which the designer is working, in the upper level environment at which the former need to be assembled. It refers to complete placement of an aggregates/assembly/sub-assembly while designing a system, considering all the design constraints within which it will assemble latterly

An assembly/sub-assembly packaging could vary as per vehicle variant. Packaging changes due to change in vehicle design constraints.

Example of packaging: for new vehicle an exhaust pipe is designed and packaged to meet BSIV requirement.

Example of Integration: Integration is to check/validate the packaged exhaust pipe (as in above example) within the vehicle, considering all the regulatory /fitment /clearances/environments requirements.

Packaging is the placement of assembly/sub-assembly within the vehicle whereas integration is validation of the placed assembly/sub-assembly within the vehicle.

**Integration**

Integration is the nature of assembly/sub-assembly, on which the designer is working, with parallel assembly that are being assembled with it.

For Example:

Suppose minimum clearance required of any part from propeller shaft is 100 mm. while integration a particular aggregate on vehicle we need to ensure 100 mm its clearance from propeller shaft.

**Functionality**

It is the parameter which specifies the work scope of a design part. a part/assembly must deliver the function it suppose to do.

Packaging and integration aspect are taken care of at DMU review level but functional aspect is not.

A number of points are checked and verify in this process to minimize or eliminate the fitment issues/functional issues on actual production vehicle. The aggregate for which review is being performed is assembled on vehicle DMU as per vehicle coordinate then its environment is studied. The study includes various

clearances/fouling of parts/sub-assemblies/assemblies from other surrounding aggregates. While performing DMU review the practises that are followed in production line considered. various accessibility of parts are studied and if there is any concern on said points the concern is communicated to design responsible person for rectification. For parts/sub-assemblies/assemblies minimum clearance from rotating, heated, moving parts is to be ensured, based certain safety guidelines. Generally clearance 200 mm for heated parts and 50 mm for rotating/moving parts. DMU review feedback is shared with concern designer and design is modified accordingly. Hence, DMU review is proactive step to contain issues in design stage itself.

**1.2 Scope of Digital Muck-UP (DMU) Review:**

It is the process of analysing, identifying & evaluating defects including leakages, dangerous proximity and interferences caused by components, pipes, cables, etc in digital model. It has to be conducted for all new and existing models throughout the different phases of product development starting from Alpha build, proto build and Pre & Post Start of Production -SOP.

Following are the DMU Review major areas:

1. Clearance/Interference & Gap Analysis
2. Fitment & Packaging Analysis
3. Ergonomic Analysis
4. Articulation Analysis
5. Vehicle Layout Finalization, etc.

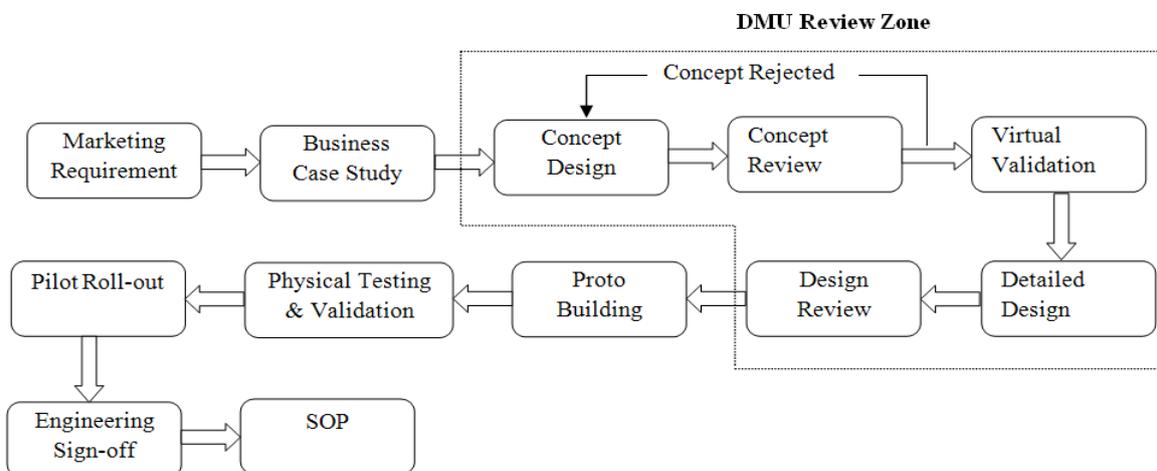


Figure 1 New product design and development phases

## 2. LITERATURE REVIEW

During the concept development phase for the selection of most suitable concept, the designer needs to focus on the ergonomic aspects of the design. Different designers and authors have emphasized the importance of ergonomic (man, machine interaction study) and the digital/physical verification of the concept design. This paper tries to explore and innovate the implementation of digital CAD tools into the Product Design for the Ergonomic aspects and requirements, which are presently considered and implemented conventionally through physical methods and tools in the automobile industry, M/S Tata Motors Ltd, Lucknow CVBU in particular. We have done the literature review for the available papers in this regard as follows:

With the use of 3D-CAD environment, the simulation related to access, reach, ingress, regress, etc. are done with varying manikin sizes resembling to the actual driver populations (Fireman, J., & Lesinski, N. 2009).

The driver's workplace contains basic requirements for an ergonomic and comfortable seating position, which is essential to keep drivers in a good state of health condition. The dimensions and mounting positions of driver's seat, accelerator and clutch pedals and steering have to be carefully chosen, considering optimum H-Point position to enable drivers to sit in an ergonomic seating position, i.e. sitting at angles which comply with the given ranges of different comfort position and to allow some variation when seated or as when are required as per regulations (ISO 16121-1, 2, 3& 4)

Ergonomic features are needed for driver comfort, visualization area and ease of access to the controls in line with the regularity requirements as per Indian government, namely the Commercial Motor Vehicle Regulations (CMVR) at product design stage. There is a possibility of addition of lot of ideas and techniques at early design and manufacturing stage of products especially in case of vehicles to make them more ergonomically strong. Maintaining Balance of body while interacting or entrance time with vehicles (e.g. during activity of Ingress/Egress etc.) is one of the key ergonomic issue. Enough gangways are required for the same. Furthermore, this area needs for Center of pressure (COP) trajectory, Center of

mass (COM) trajectory, Movement sway etc. Use of digital tools in the ergonomic study of the work location, in particular for the driver station/cab of commercial automobile enables Faster pace leading towards rapid product development (Singh, S., Singh, J., & Kalra, Borner, C. J., Hoormann, H. J., Rizer, H. G., Hütter, G., Kraus, W., Bigalke, S., ... & Kuchmeister, G. 2006)

RAMSIS simulation have a unique combination of a sound scientific foundation for ergonomics and design functionality for driver workplace design as well as for passengers setting position design. This explore and innovate the implementation of digital CAD tools into the Product Design for the Ergonomic aspects and requirements (Monacelli, G., & Elasis, S. C. P. 2003, Van der Meulen, P., & Seidl, A. 2007).

Variability in one vehicles configuration will affects the driver visibility. Driver size, seat position fore-aft, suspension design, long member top, driver station, etc. These are the areas configurations may effects on visibility (Krum, A. 2009)

## 3. BACKGROUND

"To succeed in today's tough competitive environment, manufacturing companies need to design more ergonomic products and safer, more productive workplaces" says Dick Slansky, Senior Analyst PLM & Discrete manufacturing for the ARC advisory group. Proven virtual ergonomic solution tools like DELMIA make this easy to digitally analyze human interaction in product design, manufacturing, service & maintenance and training simulation.

Vehicle packaging in design process is categorized into two areas, mechanical package design & occupant package design. While mechanical package design deals with packaging of mechanical components in a vehicle, the occupant package design studies the occupants in spatial environment. In this the location of various occupants is determined while focusing on physical location of various components in a vehicle.

It is critical in vehicle design to study how drivers/passengers interact and move with respect to vehicle packaging. Some of these motions/interactions can be closing and opening of door, how to enter in the vehicle and exit, how to buckle seat belt, accessing various controls of the

vehicle, etc. This study concludes how occupant accommodation is affected by vehicle environment & how this can be implemented during initial phase of development.

### 3.1 3D CAD: Human Factor Integration

As the customer intend to use any new product varies in their physical behavior largely on physique, geography, ethnicity & culture, the designer working on the product development must be aware of all these governing factors from the initial phase of product development throughout different stages towards design finalization and physical product manufacturing.

For new vehicle development, ergonomic aspects are finalized based on the benchmark vehicle, productionised vehicle & industry standards like AIS, IS, ISO, etc. During the earlier phase of product development the designer must focus on:

- Ingress / Egress
- Driver visibility
- Reach availability
- Other comfort constraints

There are a number of CAD tools to analyze the ergonomic behavior of any system like RULA (Rapid Upper Limb Assessment), RAMSIS (Realistic Anthropological Mathematical System for Interior comfort simulation), 3DSSPP™ & SAMMIE CAD. Although, these tools have different methods and steps but the main purpose is to analyze the manikin reaction with the product and surrounding. [5]

### 3.2 Ingress/Egress

Ingress represents first interaction of customer with the vehicle. It represents the entry of intended user inside the vehicle so as to operate it or sit inside it. The opposite term egress refers the exit of customer from the vehicle. Poor ergonomic considerations while freezing the driver/passenger area may result in injury, fatigue and discomfort which results in customer complaints leading to product failure. Maintaining body balance while interacting with vehicle during ingress/egress plays a major ergonomic decisive factor in cab/driver station design & need exploration and methods of body balance assessment. Trajectories of center of pressure (COP) and center of mass (COM) are found to be good quantitative measures of human body balance and postural control.

### 3.4 Driver visibility

In the aspect of driver visibility, vehicle should be designed in such a way that driver may drive the vehicle safely in both day and night. This refers to the vision spectrum of drivers/operators needed for intended product use. Even if the product feature and controls are good, poor visibility may result in driver discomfort leading to customer dissatisfaction which may result in product failure. Following standards are referred to for establishing driver visibility in Indian automobile industry:

**Table - 1 List of standards for driver visibility**

Sr No.	Standard	Details
1	AIS052	Driver's Visibility Requirement (Visibility Zone)
2	AIS032	Forward Visibility
3	ECE R46	Approval of devices for Indirect Vision
4	AIS002	Rear View Measurement
5	ISO 16912 P2	Road vehicles-Ergonomic requirements for the drivers workplace in line-service buses - Part 2 : Visibility
6	AIS012	Lighting & light signalling requirements
7	AIS002	Rear View Mirror

Critical in vehicle design to study how drivers interact and move with respect to vehicle instrument cluster and mirrors (Front and Rear)

have been considered as per ISO 1621 (refer below table)

### 3.3 Reach availability

After finalizing the driver seat, virtual ergonomic verification for the areas & controls inside driver cab and passenger area are established. Indian automobile industry refers the standard AIS046 for hand approach and reach.



Figure 1 Reachability

(Adopted from: RAMSIS & Monacelli G)

Virtual ergonomic verification is usually done for reach analysis of controls like steering wheel, GSL, ABC pedal position, dashboard switches/knobs, rear view and side mirrors, roof controls, hand brake etc. implementing digital ergonomic review along with DMU review reduces the chances of operational short comings after physical development.

## 4. ERGONOMIC: VIRTUAL REVIEW AREAS

These collected data are optimized digitally using 3D CAD tools and physically on cross verification and feedback from operators, designers, engineers and customers. For Indian markets, commercial & passenger vehicles ergonomic requirements are followed from Automotive Industries Standard - AIS in following areas:

- Driver Station
- Front Panel / Instrument Cluster
- Steering Wheel Position
- Gear Shift Lever Position

- Accelerator , Brake & Clutch Pedal Position
- Passenger Seating Posture

All above control positions are established after establishing the driver seat H-Point.

Since the ergonomically suitable position of driver seat H-Point (X, Y, Z) plays the most important role, it is established first by considering:

- Vehicle VCS
- Steering System Hard Points

### 4.1 Vehicle VCS

With respect to the vehicle VCS, H-point X, Y, Z co-ordinate positions are defined based on the feedbacks as discussed earlier.

For this, the most suitable position of driver seat is first established considering the position of CAB, Cowl or Front End Structure (FES) floor, door position, windscreen, side pillars, etc. and their relative positions w.r.t. vehicle VCS. Once this position is frozen, control positions of steering wheel, GSL, ABC pedals, electronic control, etc. are analyzed and frozen for ergonomically suitable design.

The directional orientation of VCS must as given below:

- X – Direction: Starting at front axle plane, positive towards rear of vehicle
- Y- Direction: Starting at vehicle center, positive towards right side of vehicle
- Z- Direction: Starting at long member top, positive towards upward

For proper DMU making, every aggregates assembly must comply to Location & orientation of co-ordinate system of aggregates CAD assembly must be as per VCS & Each AGGREGATES CAD assembly must have references given in below table. For uniformity & easy understanding notations of Planes, Axis & Coordinates systems must be same as that of given in below table

Table 2 VCS Notation

Sr. No.	Notation to be used in Skelton part	Details	Applicable in Groups
1	FACP	Front Axle Centre Plane (Rename 'ASM_YZ Plane as 'FACP')	All Groups
2	LM_TOP_AT_123_From_Ground	Long Member Top At 123 mm from Ground (Rename 'ASM_XY Plane as 'LM_TOP_AT_123')	All Groups
3	VC	Vehicle Centre Plane (Rename 'ASM_XZ' Plane as 'VC')	All Groups
4	RACP	Rear Axle Centre Plane (To be created at 123mm from FACP)	All Groups
5	GROUND	Ground Plane (To be created at 123mm from LM_TOP_AT_123_From_Ground)	All Groups
6	WHEEL_CP_AT_123	Wheel Centre Plane (To be created at a height of 123mm from Ground)	All Groups
7	FRONT_WHEEL_CENTER_AXIS	Front Wheel Centre Axis (To be created passing through the centre of front axle wheels)	Frame, Suspension, Tyre & Rear Axle
8	REAR_WHEEL_CENTER_AXIS	Rear Wheel Centre Axis (To be created at intersection of Rear Axle Centre Plane & Wheel Centre Plane)	Frame, Suspension, Tyre & Rear Axle
9	VCS	Vehicle Coordinate System (CSYS_ASM_DEF)	All Groups

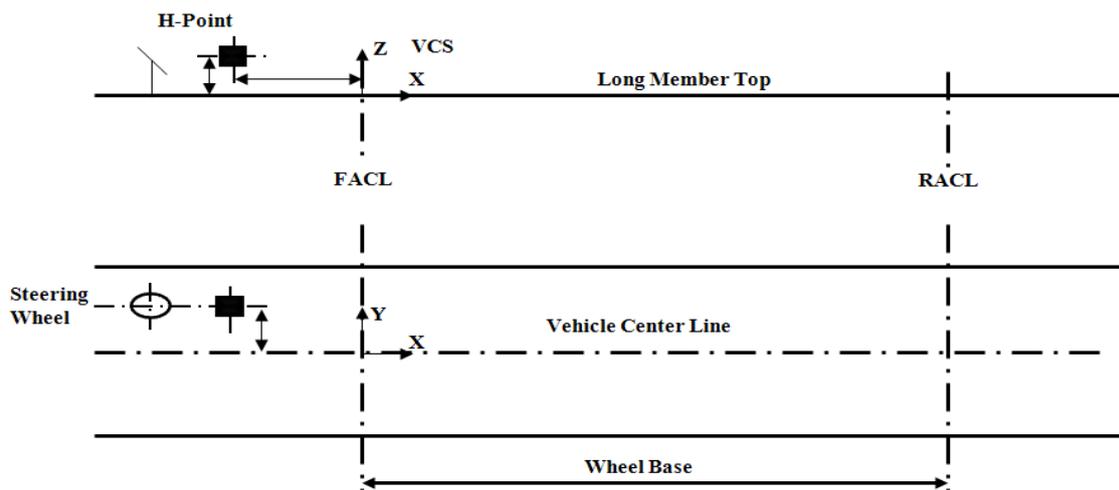


Figure 2 Vehicle hard point position

#### 4.2 Steering System Hard Points

With respect to the vehicle steering system hard points, H-point X, Y, Z co-ordinate positions are defined based on the feedbacks as discussed earlier.

For this, Steering system hard points are finalized first by considering vehicle turning center diameter (TCD), steering force requirements and vehicle

packaging constraints with respect to drag link, pitman arm, steering arms, steering gear box, steering wheel and linkages positions.

Once the steering wheel position is finalized, seat H-point position is finalized with the help of standards and feedback as discussed earlier. Once this position is finalized, control positions of GSL, ABC pedals, electronic control, etc. are analyzed and finalized for ergonomically suitable design.

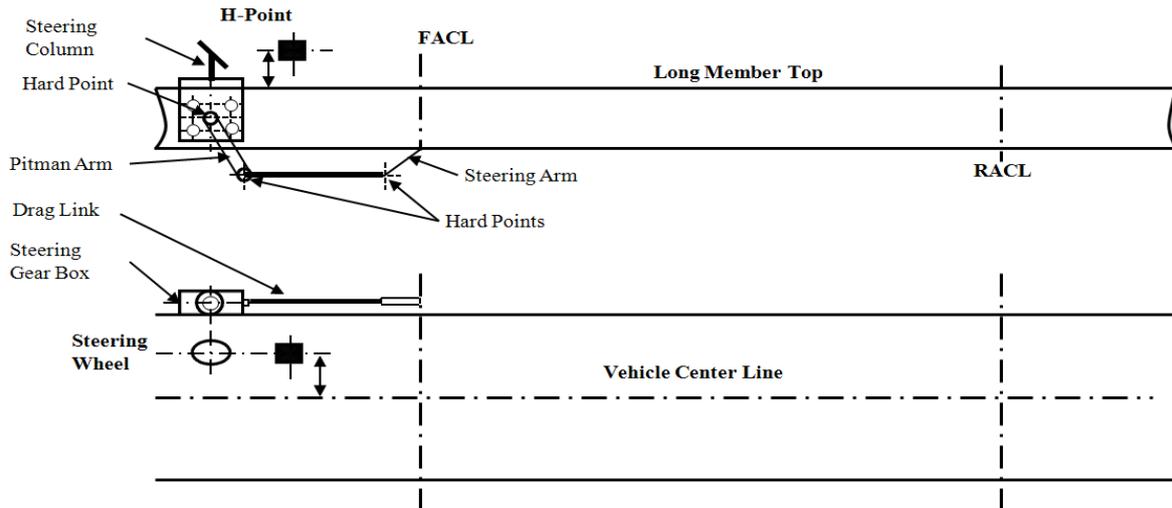


Figure 3 Vehicle hard points

The Y-axis of the H-Point should always be on steering wheel central plane and parallel to vehicle center line.

#### 4.3 Digital Ergonomic Review

Early consideration in Product development phase to avoid product shortcomings later. Passenger/driver accommodation and ease of access towards different segments like gangway, luggage compartments, overhead controls, etc. Critical in vehicle design to study how drivers/passengers interact and move with respect to vehicle packaging. Needed for motions/system interaction like door closing and opening, vehicle entry and exit, seat belt fastening, accessing various controls of the vehicle, etc

Once the H-point of driver seat is finalized, complete vehicle DMU is assembled and integrated. Now the feasibility and worthiness of each control features as described earlier is reviewed digitally in 3D CAD environment for ergonomic aspects. Based on the digital study and interpretation most optimal positions of all controls are finalized and freed. As stated earlier this study is strictly based on the benchmark & productionised vehicles and industry standards like

AIS, IS, ISO, etc.

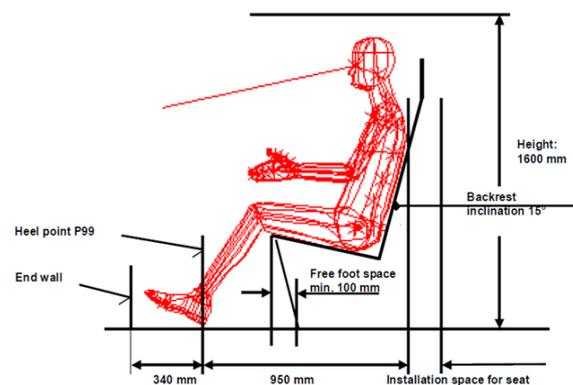


Figure 4 Dimensions of Driver's Workplace,  
(Adopted from: IS16121)

## 5. CASE STUDY

To support the importance of ergonomic study and validation during the early phase of product development through the DMU review in 3D CAD environment, a recent case study is presented below:

*“During the manufacturing of one of the vehicle models to be supplied to the international market, the end customer complaint about less gap between the steering wheel and driver seat which caused the driver to get stuck between the two”.*

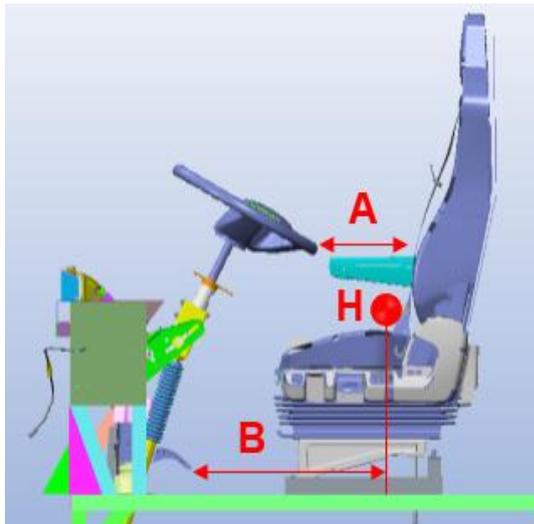


Figure 5 Driver Seat Arrangement

The layout of driver seat w.r.t. the driver station and steering wheel position was then checked for the ergonomic aspects as per the applicable Indian standards (AIS052). It was found that although the current layout was meeting the required Indian norms, it was failing against the requirement international market and customers due to variability in driver size or populations (5<sup>th</sup> %ile Female to 95<sup>th</sup> %ile Male setting eye height).

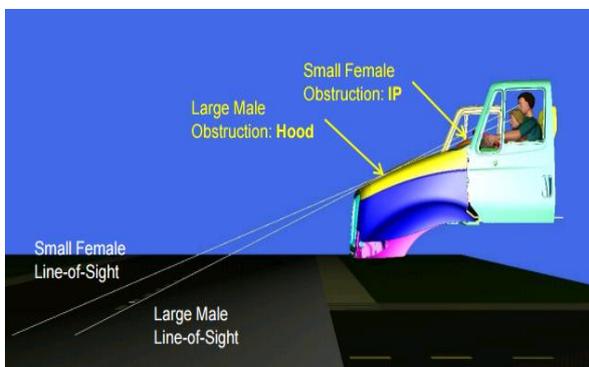


Figure 6 Variability in Driver Size  
Adopted from: Krum, A. (2009).

To meet this new requirements, the layout was modified as per the international requirements and digital manikin validation using the international population of the manikins. This resulted in a wider range of the driver seat positions meeting Indian as well as the international customer segments.

**Design calculations:**

Table 1 Driver Seat Dim's

Parameter	Range (as per AIS052)	Current Value	Remarks
Steering wheel to driver's seat back rest (Min.) (A)	350	365	Ok as per standard, passing by 15
H- point to Heel point (B)	600-640	646	Ok as per standard, missing by low margin (6)

Travel allowed in seat (horizontal) = 180

Max. Backward motion allowed for seat = 350-365+180= 165

Effect on heel point = 646+165-180 = 631 (Ok)

Hence, max. Backward shift allowed = 165

For steering GB accessibility, seat shifted by 90mm rearward.

**6. CONCLUSION**

This paper deals with the advantages of using digital tools in the ergonomic study of the work location, in particular for the driver station/cab of commercial automobile. The main areas of focus include the driver comfort, visualization area and ease of access to the controls in line with the regularity requirements as per Indian government, namely the Commercial Motor Vehicle Regulations (CMVR). A comparison is made for the time & cost assessment between the conventional and digital approaches of the same to conclude the effectiveness of the former over the later. Use of digital tools into the ergonomic study has reduce the time and cost of the same by reducing requirement of physical manikin and its installation over the driver sheet, hard points determination for controls, manpower, etc. With the use of 3D-CAD environment, the simulation related to access, reach, ingress, regress, etc. are done with varying manikin sizes resembling to the actual driver populations. Further, same approach can be extended to different models and configuration of cab, driver station, vehicle body, passenger seats, gangways, luggage compartments, etc. at a faster pace leading towards better customer satisfaction and achieving the world class quality (WCQ) targets and benchmarks.

**6. FUTURE SCOPE**

- Digital ergonomic approach can be extended to different models and configuration of cab, driver station,

vehicle body, passenger seats, gangways, luggage compartments, etc.

- Faster pace leading towards rapid product development
- Better customer satisfaction and achieving the world class quality (WCQ) targets and benchmarks.

## 7. ACKNOWLEDGMENTS

Firstly, the author would like to acknowledge the Tata Motors Ltd.- ERC for cooperation and providing live case studies for analysis and validation at outdoor testing lab and I sincerely thank Dr. M K Arya & Rahul Kumar for providing the valuable suggestions and guidance during the analysis.

## 8. REFERENCES:

1. Borner, C. J., Hoormann, H. J., Rizor, H. G., Hütter, G., Kraus, W., Bigalke, S., ... & Küchmeister, G. (2006). Driver's workplace in motor coaches. 91st session, 17-20.
2. Fireman, J., & Lesinski, N. (2009). Virtual Ergonomics: Taking human factors into account for improved product and process. Dassault Systèmes Delmia Corp.
3. IS 13749: Automotive vehicles - Procedure for determining the 'H' point and the torso angle for 50th percentile adult male in seating positions of motor vehicles
4. ISO 16121-1:2012, Road vehicles -- Ergonomic requirements for the driver's workplace in line-service buses -- Part 1: General description, basic requirements
5. ISO 16121-2:2011, Road vehicles -- Ergonomic requirements for the driver's workplace in line-service buses -- Part 2: Visibility
6. ISO 16121-3:2011, Road vehicles -- Ergonomic requirements for the driver's workplace in line-service buses -- Part 3: Information devices and controls
7. ISO 16121-4:2011, Road vehicles -- Ergonomic requirements for the driver's workplace in line-service buses -- Part 4: Cabin environment
8. Krum, A. (2009). Visibility Modeling from a Heavy-Vehicle OEM's Perspective. In *Proceedings of the 19th Biennial TRB Visibility Symposium, May* (pp. 12-14).
9. Singh, S., Singh, J., & Kalra, P. Ergonomic evaluation of Ingress/Egress of vehicle using balance assessment approach
10. Monacelli, G., & Elasis, S. C. P. (2003). VR Applications for reducing time and cost of Vehicle Development Process.
11. Norazam, J. (2008). Computer Aided Ergonomics Design Analysis In Automotive Application.
12. Van der Meulen, P., & Seidl, A. (2007). Ramsis—the leading cad tool for ergonomic analysis of vehicles. In *Digital Human Modeling* (pp. 1008-1017). Springer Berlin Heidelberg.